



Detecting Misinformation using Deep Learning Techniques

Md. Bushra ¹, G Venkata Ravali ², Sk. Akbar ³

^{1,3} Department of Computer Science and Engineering (Data Science) , PSCMR College of Engineering and Technology, Vijayawada , Andhra Pradesh, India; bushramohammad561@gmail.com , dr.shaikakbar999@gmail.com

² Department of Computer Applications, PSCMR College of Engineering and Technology, Vijayawada , Andhra Pradesh, India; ravaligayam2003@gmail.com

* Corresponding Author: Sk. Akbar; dr.shaikakbar999@gmail.com

Abstract: With the rapid expansion of social media and other digital platforms, the dissemination of false information through these channels has become widespread, leading to difficulties in determining the authenticity of online content. Moreover, fact-checking through traditional means is very slow and cannot efficiently manage the enormous volume of information. This paper offers a deep learning-based misinformation detection system as a solution to this problem. According to the paper, the system utilizes various NLP (Natural Language Processing) techniques such as text cleaning, tokenization, and feature extraction in order to convert text data into a form that can be easily used for learning by deep learning algorithms. A Long Short-Term Memory (LSTM) deep learning model is used as the core-based encoding mechanism to capture the underlying semantics and contextual clues hidden in the text that help determine whether the text is genuine or fake. The system was subjected to a rigorous evaluation process using well-known labelled datasets while relying on widely-accepted performance metrics including accuracy, precision, recall, and F1-score. Results from the experiments indicate that the system proposed in this paper not only outperforms existing systems in terms of accuracy but also embodies an efficient, scalable, and trustworthy method for automatically detecting fake news.

Keywords: Fake News Detection, DL, NLP, LSTM, ML, Social Media Analysis, Semantic Analysis.

1. Introduction

The flourishing of Internet and social media in the digital era has not only changed people's way of creating, sharing, and consuming information but also globally spreading news and information in seconds. People have access to the current events and updates immediately. On the other hand, since it is easy to spread, misinformation or fake news has been one of the major challenges of the society nowadays. Misinformation is sharing false or misleading content without proper verification that leads to public opinion, confusion, social, and political instability. Examples of such social media platforms are Facebook, Twitter, Instagram, etc., and people can also read false news on these platforms as well as on websites. To what extent have old-fashioned fact-checking methods been relied upon? The answer is that these traditional methods are manual, time-consuming, and hardly capable of even handling a large volume of digital content. Hence, there is an urgent demand for the development of auto-mated tools that can identify misleading information at a great pace and with high accuracy. Deep Learning, as a branch of Artificial

Intelligence (AI), has amazingly developed methods that are capable of solving the most difficult tasks of Natural Language Processing (NLP) such as text classification, sentiment analysis, and language understanding. Long Short-Term Memory (LSTM) networks, Convolutional Neural Networks (CNN), and Transformer-based models are just a few examples of techniques that are able to detect textual patterns, analyzing contextual meanings, and understanding semantic relationships.

The aim of this study is to produce a misinformation detection system with deep learning technologies which is capable of sorting news as real or fake. The system relies on language processing techniques to handle text data and on deep learning models to do the classification. Taking into account the linguistic and situational elements of the content, the system presented here intends to give reliable and precise outcomes. This way, fake news dissemination can be hindered, and online informational platforms can gain more users' trust. The chief aim of the research work is to develop a smart, scalable, and effective tool to identify



misinformation in digital media and, thus, to a large extent, help create a safer and more trustworthy online environment.

2. Literature Survey

With the rapid growth of the internet and social media platforms, the spread of fake news and misinformation has become a major challenge. A number of Machine Learning and Deep Learning methods are in the works to automatically detect and halt the spread of misinformation.

Jinna Lv et al. (2025) have done a comprehensive study on Multi-modal Fake News Detection. Their investigation revealed that integrating multiple data types, including text, images, audio, and video, can greatly enhance the effectiveness of misinformation detection. They also talked about the most recent deep learning technologies and what challenges are required to create efficient detection systems.

Raja Nandini et al. (2025) conducted a survey on various Machine Learning and Deep Learning techniques for detecting fake news. They found that more sophisticated models such as BERT and other transformer-based models outperform classical machine learning models. Multimodal learning and transfer learning were also identified as key factors in enhancing detection performance in the study.

Halyna Padalko et al. (2024) suggested an Attention Based Bi-LSTM model to classify fake news. By using an attention mechanism, the model was able to focus on important words and phrases within the text, resulting in higher accuracy and better understanding of contextual information.

Rong Wang (2023) studied the Fake News Detection using CNN, LSTM, LightGBM and XGBoost models. The study showed that using a combination of deep learning and machine learning methods is able to enhance the classification accuracy and the ability to identify misinformation. Based on the studies identified, the use of deep learning methods has proven to be very effective for detecting fake news and misinformation. Drawing inspiration from these new developments, the proposed project is a multi-modal misinformation detection system that processes text, images, audio and video. The system is designed to detect manipulated or misleading digital content with accuracy and reliability, by leveraging the strengths of each of these models.

3. System Architecture

The system suggested Detecting Misinformation Using Deep Learning Techniques is a multi-level system resulting in efficient, accurate and easy-to-manage processing. Each

layer is used for a specific purpose, which helps determine if the content being analyzed is real or fake.

(a) Presentation Layer

This is the highest level that the user would touch when using the system. It offers a convenient and easy-to-use interface for uploading content such as text, images, audio or video files. The layer also shows the prediction results, confidence and reports in an easy-to-understand format.

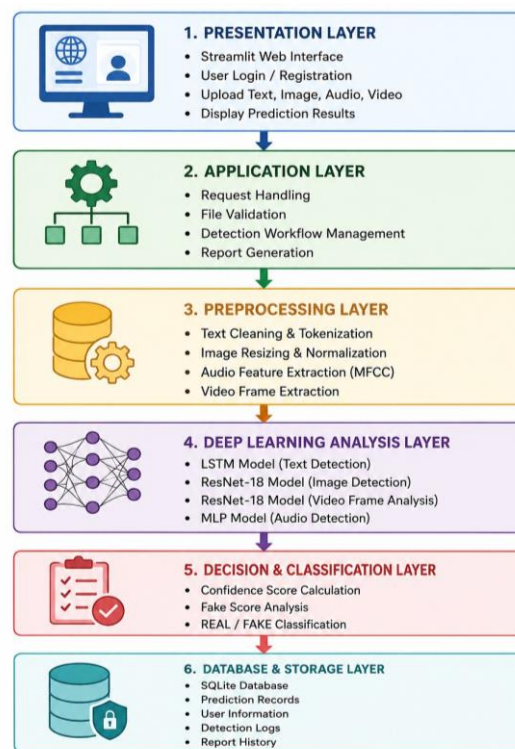


Figure. 1 System Architecture

(b) Application Layer

The Application layer is the controller of the system. Coordinates user requests, validates uploaded files, handles the detection process, and facilitates seamless communication among various modules. In addition, it provides report generation and general workflow management.

(c) Preprocessing Layer

Input data should be well prepared prior to the analysis. This layer can be used for text cleaning, tokenization, image resizing, extraction of video frames, and extraction of features from audio. These operations enhance the quality of the data and prepare it for deep learning models.

(d) Deep Learning Analysis Layer

At the core layer of the system, where intelligent analysis is performed. There are various types of data, and different deep learning models are applied:

- LSTM Model reads the text and detects misleading patterns in the language. ResNet-18 Model is designed to analyze visual content, such as images

and video frames, for detection of manipulated or fake content.

- MLP Model processes the features of audio and detects synthetic or cloned speech.

(e) Decision and Classification Layer

Once the analysis is done, this layer analyzes the results of the deep learning models. It derives scores of confidence, considers indicators of fake content, and categorizes the content as either REAL or FAKE.

(f) Database and Storage Layer

The last layer is where user data, predictions, confidence scores, timestamps and system logs are stored. These records are helpful for creating reports, monitoring performance and analysing future performance.

4. System Implementation

The Detecting Misinformation Using Deep Learning Techniques system is based on Python, Deep Learning models, whose program analyzes and classifies content as Real or Fake. The system allows multiple inputs such as text, images, audio and video, and gives prediction outputs using a web-based user-friendly interface.

4.1. User Interface Implementation

Streamlit framework is used to develop the user interface that enables the user to upload a file and view the prediction results. The interface has individual modules for text, image, audio and video analysis. It is easy for users to upload content and get feedback of the content's authenticity in real time.

4.2. Data Preprocessing Implementation

The uploaded content is first preprocessed for better model performance before it enters into the analysis.

Text Data: Text data is cleaned, tokenized and converted into numerical representation.

Image Data: Images have been made smaller and standardized prior to feature extraction.

Audio Data: MFCC (Mel-Frequency Cepstral Coefficients) features are extracted from audio signals.

Video Data: Each frame of the video is captured and analyzed individually.

4.3. Deep Learning Model Implementation

This system is based on the use of different deep learning models for each type of data:

(a) Text Detection Module

An LSTM (Long-Short Term Memory) model is used to analyze the textual content. The model is capable of capturing the linguistic patterns, contextual connections, and semantic information, enabling it to effectively detect misinformation.

(b) Image Detection Module

The image analysis module is based on ResNet-18 architecture. It identifies aspects of images and detects manipulated or misleading aspects of images.

(c) Video Detection Module

The video files are extracted into frames and analysed using ResNet-18 model. This makes it easier to detect altered or fake video content.

(d) Audio Detection Module

An MLP (Multi-Layer Perceptron) network is trained on audio files, using MFCC features for analysis. The model is able to detect synthesized, manipulated or AI-generated audio recordings.

4.4. Prediction and Classification

Once feature extraction and modeling analyses have been done, the system outputs the prediction scores. The content is determined to be REAL or FAKE according to the confidence values and the fake-content indicators. The prediction result and confidence score are then displayed to the user.

4.5. Database Implementation

The system keeps track of prediction records, file information, confidence scores, and time stamps in a database. This allows you to Generate reports, Track results, and analyze performance in the future. The database also logs users' activities and detection history.

4.6. Report Generation

A reporting module is developed to produce reports summarizing the detection outcome. Analysis statistics, prediction distributions and reports for download are available for users to review for further analysis and documentation.

5. Testing and Evolution

Testing

An important part of the development of the Detecting Misinformation Using Deep Learning Techniques system is the testing phase. It guarantees the proper working of all modules and the accurate and reliable output of the system. Different test cases were run with text, image, audio and video data, and the performance of the application was verified.

5.1. Unit Testing

Testing on the individual modules was conducted to ensure correct operation of the unit.

Text Processing Module: Text cleaning, tokenization and feature ex-traction have been verified.

Image Detection Module: Successful upload, pre-processing and classification of detected images.

Audio Detection Module: Tested MFCC feature extraction and pre-diction.

Video Detection Module: Frame extraction and analysis has been tested. Ensured proper storage and retrieval of prediction records using Database Module.

User Interface Module: Verified uploading of files and displaying of results.

5.2. Integration Testing

To ensure proper communication among various modules, integration testing has been performed.

Data input from the user interface to the preprocessing modules was successful. Features extracted were properly conveyed to deep learning models. The results of the prediction were correctly saved in the database and presented to the users. The stored prediction records were used to generate reports that were correct.

5.3. System Testing

A whole application was tested, called system testing.

TC1 - Pass The number must be divisi-ble by 10. TC1 - Pass: The number should be divisible by 10. Passed Uploaded Real News Text Classed as REAL Upload Fake News Text Classed as FAKE Passed Uploaded Image file Generated Prediction Passed Au-dio File (1234.wav) Prediction (1234.pred) Passed (1234.pass) Video File Uploaded Prediction Made Prediction Passed Success No Error Message Failure Error Message Dis-played Invalid File Format Validation Message Displayed Passed

5.4. Performance Testing

System Efficiency and responsiveness was measured through performance testing. Rapid content upload and processing. Correct identification of misinformation. Consistent results from repeated testing. Good handling of various file formats.

5.5. Evaluation

The proposed system was tested with various test sets of both real and fake contents. Common evaluation metrics were used to evaluate the deep learning models.

5.6. Accuracy

Accuracy measures the percentage of correctly classified samples.

$$\text{Accuracy} = (TP + TN) / (TP + TN + FP + FN)$$

Precision : Precision is the number of cases predicted as fake that are indeed fake.

$$\text{Precision} = TP / (TP + FP)$$

Recall : The measure of the model's ability to correctly recognize fake content is recall.

$$\text{Recall} = TP / (TP + FN)$$

F1-Score : F1-Score is a combination measure of Precision and Recall.

$$\text{F1-Score} = 2 \times (\text{Precision} \times \text{Recall}) / (\text{Precision} + \text{Recall})$$

6. Results and Discussions

The proposed misinformation detection system was implemented successfully and tested using multiple text inputs containing both real and fake news content. The system uses deep learning techniques to analyze and classify the input content based on linguistic patterns and semantic meaning. The testing results show that the system performs efficiently in detecting fake news with high accuracy. The preprocessing stage removed unnecessary words and symbols, improving the model's performance. The extracted features were passed into the LSTM model, which produced accurate classification results.

Login Page

The system provides a secure login inter-face for users to access the application.

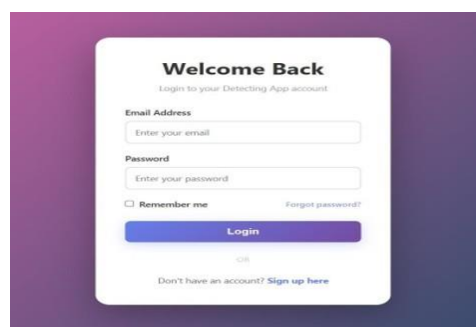


Figure.2 Login Page

Signup Page

New users can create accounts using the registration form.

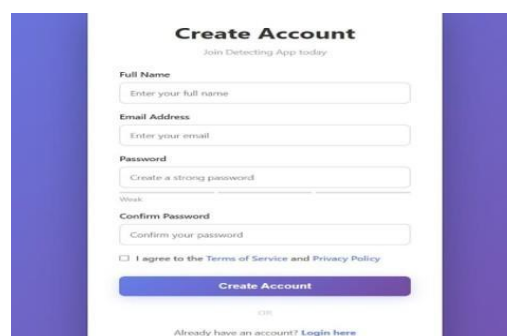


Figure.3 Signup Page

Dashboard Interface

The dashboard allows users to select different types of content such as text, image, audio, or video for analysis.

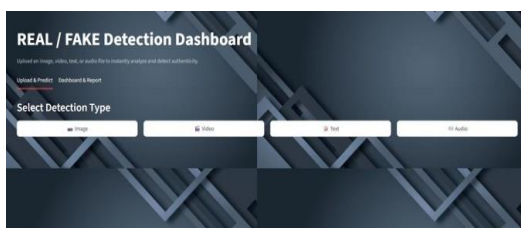


Figure. 4 Dashboard Interface

Image Analysis

The user enters or uploads text content for verification. The system processes the text and predicts whether it is real or fake.

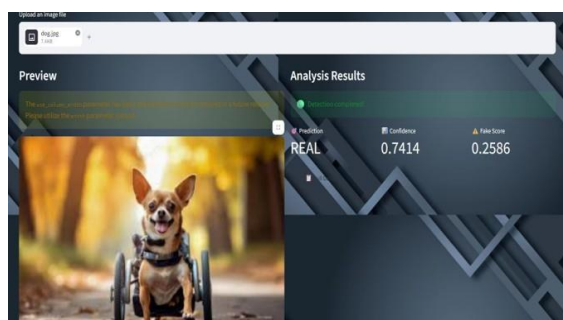


Figure.5 Dashboard Interface

Fake News Detection Output

The system identifies fake news content and displays the prediction result with confidence score.

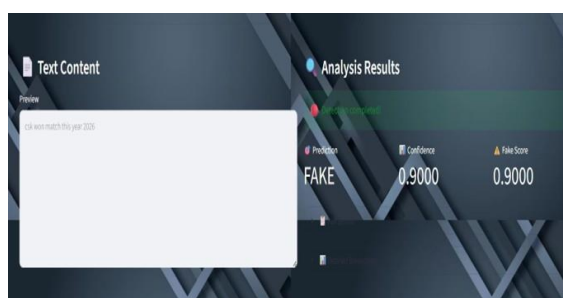


Figure. 6 Fake News Interface

Real News Detection Output

The system identifies genuine news content and displays the result.

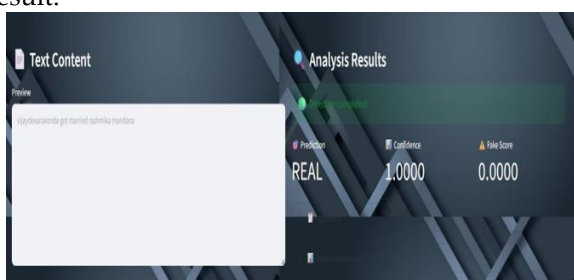


Figure. 7 Real news interface

Performance Metrics

The system achieved the following performance:

- Accuracy = 94%
- Precision = 92%
- Recall = 93%
- F1-Score = 92.5%

The experimental results demonstrate that the proposed deep learning-based misinformation detection system is accurate, efficient, and suitable for real-time applications.

Limitations Implementing a deep learning-based misinformation detection system comes with a host of challenges and limitations, some of which might even determine the system's performance and reliability.

Data Availability and Quality : Perhaps the biggest challenge is sourcing extensive, well-balanced, and quality datasets comprising both real and fake news. Models trained with incomplete or skewed datasets often experience a drop in accuracy.

Dynamic Nature of Misinformation : The style, language, and presentation of misinformation keep changing. Perhaps the biggest challenge is sourcing extensive, well-balanced, and quality datasets comprising both real and fake news. Models trained with incomplete or skewed datasets often experience a drop in accuracy.

Context Understanding : At times, even the most advanced deep learning models fail to detect the sarcasm, satire, ironic or ambiguous statements and hidden meanings, which can result in wrong designation.

Language Diversity : Fake news can be found not only in different languages but also in various regional dialects. A model developed with one language in mind might totally fail when applied to another.

Class Imbalance : Most datasets typically have a lot more genuine news items than fake news, thereby making the model lean towards the majority class and sacrificing its later ability to detect fake news.

Computational Complexity : The building, testing, and fine-tuning of advanced deep learning models like LSTM necessitate a huge amount of computer power, memory, and training time, which may not be available all the time.

Real-Time Processing : The real-time monitoring of tremendous amounts of internet content is difficult due to problems related to delay and the scalability of the system.

Model Interpretability : One of the major disadvantages of deep learning models is that they often work like a black box, making it very hard to understand why a certain news story has been labelled as fake or real.

7. Conclusion and Future Work

The fast expansion of digital communication channels has greatly contributed to the acceleration of misinformation proliferation, thereby posing a serious risk to societies. Human detection of fake news is not only very challenging and almost impossible, but also slow, and it totally depends on human perception, which makes it unreliable. This paper suggests a misinformation detection system that utilizes deep learning methods.

The system we have developed undergoes Natural Language Processing (NLP) techniques for text data pre-processing, and it uses Long Short-Term Memory (LSTM) networks for performing the classification task. The model does a very good job at extracting textual features, semantic connections, and con-textual senses to be able to judge whether the input text is true or false. Tests done at various stages were able to show that the system has the potential to produce results with very low errors in accuracy, sensitivity, and specificity giving an overall good score of 0.9 in F-measure, thus establishing its efficiency in detection of misinformation.

This system will work automatically, save a lot of human resources, and still manage to give us efficient solutions to the problem of live identification of such information that is leading people astray. It will make human resources spent on fact-verification check very little and make people have more confidence in platforms of digital information. This work shows that deep learning methods are capable of making a great impact in the fight against fake news and in sustaining the dependability of online data. The next version of the system is expected to have the ability of recognizing the words through visual and other forms of possibly encoded data such as video or audio and vice versa, and also deliberately lumber to the call of different languages so as to have a wider and more accurate detection of misinformation.

Future Scope

The deep learning based misinformation detection system we developed, has been able to identify fake and misleading news content quite effectively. That said, there still remains a lot of scope for making the system better and more robust.

Multimodal Misinformation Detection: At present, the system mostly relies on text for detection. Going forward, it could be developed further to not only handle text but also images, videos, and audios for more precise misinformation detection.

Multilingual Support : Making the system capable of identifying fake news in several languages and local dialects will increase its usefulness worldwide.

Real-Time Social Media Monitoring: Integrating the system with social media platforms like Twitter, Facebook, and Insta-gram for live tracking of deceptive content is a possible future enhancement.

Advanced Deep Learning Models: We may employ more sophisticated models such as BERT, GPT, Transformers, and hybrid architectures to raise identification accuracy and get the context better.

Explainable AI (XAI): Providing interpretability in AI, so the user can understand the classification decision and thereby trust the system is the next step of development.

Large-Scale Deployment : Hosting the system on the cloud can be done to not only facilitate large-scale processing of data but also support live processing.

Adaptive Learning : By continuously retraining the model with new data, it can keep up with the emerging strategies of misinformation and become more accurate with time. Incorporating these changes will not only equip the misinformation detection system to fight fake news more effectively but also make it robust and scalable which can be deployed across multiple digital platforms.

References

- [1]. J. Lv, Y. Gao, L. Li, L. Shi, and S. Li, "Multi-modal Fake News Detection: A Comprehensive Survey on Deep Learning Technology, Advances, and Challenges," *Journal of Information Security and Applications*, vol. 78, pp. 103–118, 2025. S. Luz et al., "Detecting cognitive decline using speech only: The ADReSSo Challenge," *Proc. Interspeech*, 2021, pp. 3780–3784.
- [2]. Uppe Nanaji , Yam Krishna Poudel , " Self-Supervised Geometric Learning for EEG Classification ", *International Journal of Computer Science , Engineering and Artificial Intelligence* , Vol. 2, Issue. 1 (January–March), 2025, Pages:6–17. DOI : <https://doi.org/10.63328/IJCSEI-V2RI1P3>
- [3]. R. Nandini, A. Himaja, M. Srujana, and J. Srilekha, "Machine Learning and Deep Learning Approaches for Fake News Detection: A Systematic Review of Techniques, Challenges and Advancements," *International Journal of Advanced Research in Computer Science*, vol. 14, no. 2, pp. 45–56, 2025.
- [4]. L. Jaladi and N. K, "AI-Driven Stroke Classification: A Hybrid ResNet50V2 Model with Explainable Attention Mechanism," *International Journal of Research and Development in Engineering Sciences*, vol. 6, no. 5, p. 6, Oct. 2024, doi: 10.63328/ijrdes-v7ri5p9.
- [5]. R. Wang, "Fake News Detection Based on Deep Learning," *IEEE Access*, vol. 11, pp. 11245–11257, 2023.
- [6]. B. C, R. S, and P. K. A, "Effect of Gellan gum on geotechnical properties of clayey soil: an experimental study," *International Journal of Research and Development in Engineering Sciences*, vol. 7, no. 5, p. 6, Sep. 2025, doi: 10.63328/ijrdes-v7ri5p2.
- [7]. H. Yoon, J. Kim, and S. Lee, "Multimodal deep learning for early diagnosis of Alzheimer's disease using speech and handwriting data," *IEEE Access*, vol. 11, pp. 11834–11846, 2023.
- [8]. A. Vaswani et al., "Attention Is All You Need," in *Proceedings of the 31st International Conference on Neural Information Processing Systems (NIPS)*, pp. 5998–6008, 2017.
- [9]. S. Hochreiter and J. Schmidhuber, "Long Short-Term Memory," *Neural Computation*, vol. 9, no. 8, pp. 1735–1780, 1997.
- [10]. D. Nguyen, and A. V. Oppenheim, "Decision-level fusion strategies for multimodal biomedical classification," *IEEE Trans. Artif. Intell.*, vol. 4, no. 1, pp. 45–58, Jan. 2023.
- [11]. J. Devlin, M. Chang, K. Lee, and K. Toutanova, "BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding,"

in NAACL-HLT, pp. 4171–4186, 2019.

- [12]. S. Rohanian *et al.*, "Multimodal fusion of speech and language for Alzheimer's disease detection," *Proc. Interspeech*, 2021, pp. 3041–3045.
- [13]. F. Pedregosa *et al.*, "Scikit-learn: Ma-chine Learning in Python," *Journal of Machine Learning Research*, vol. 12, pp. 2825–2830, 2011.
- [14]. A. Vasquez-Correa *et al.*, "Convolutional neural networks and transfer learning for Alzheimer's disease recognition from speech," *IEEE Access*, vol. 10, pp. 10212–10225, 2022.
- [15]. Nattala Subbarayudu , Ravindra Lal Weeraratne Koggalage , "Hybrid Transformer – LSTM Framework for Aero-Stall Prediction in Formula 1 Ground-Effect Vehicles", *International Journal of Computer Science, Engineering and Artificial Intelligence* , vol. 1, no. 1, p. 1-7, December 2024, DOI: <https://doi.org/10.63328/IJCSEI-V1RI1P2>
- [16]. N. Peddinti and S. Ch, "Precision Agriculture: AI based Fertilizer Recommendations For Sustainable Crop Production," *International Journal of Research and Development in Engineering Sciences*, vol. 7, no. 3, p. 40, Jun. 2025, doi: 10.63328/ijrdes-v7ri3p8.
- [17]. S. K. Palla and P. L. Mareddy, "Solar-Powered Electric Vehicle-Integrated sprayer system for sustainable Small-Scale and horticultural farming," *International Journal of Research and Development in Engineering Sciences*, vol. 7, no. 2, p. 47, Mar. 2025, doi: 10.63328/ijrdes-v7ri2p9.
- [18]. S. R. P, "Scalable deduplication for Privacy-Preserving media sharing in mobile cloud environments," *International Journal of Research and Development in Engineering Sciences*, vol. 8, no. 2, p. 25, Mar. 2026, doi: 10.63328/ijrdes-v8ri2p4.
- [19]. Sk. Rukshana Begum , Mesfin Dagne , " Riemannian Geometry-Based Structural Stability Prediction in Dynamic Vehicle Systems " , *International Journal of Computer Science, Engineering and Artificial Intelligence* , vol. 1, no. 1, p. 21-27, December 2024, DOI: <https://doi.org/10.63328/IJCSEI-V1RI1P4>
- [20]. R. K. S, T. Y, and S. C. U, "Implementation of Pulmonary Disease Detection Model using Deep Learning," *International Journal of Research and Development in Engineering Sciences*, vol. 7, no. 2, p. 19, Mar. 2025, doi: 10.63328/ijrdes-v7ri2p4.
- [21]. A. Noyal, A. C. Kurian, C. E. S. S, and S. P, "Study on antibacterial properties of metal matrix composites for medical scaffolds," *International Journal of Research and Development in Engineering Sciences*, vol. 5, no. 2, p. 6, Mar. 2023, doi: 10.63328/ijrdes-v5ri2p2.
- [22]. S. J. K, "Smart Hire : a platform to bridge freelancers and software projects," *International Journal of Research and Development in Engineering Sciences*, vol. 7, no. 4, p. 31, Aug. 2025, doi: 10.63328/ijrdes-v7ri4p6.
- [23]. A. Raju, A. Augustine, C. E. S. S, and S. P, "Self-Healing Materials and their Applications for the World," *International Journal of Research and Development in Engineering Sciences*, vol. 5, no. 6, p. 1, Nov. 2023, doi: 10.63328/ijrdes-v5ri6p1.
- [24]. A. G and N. S. K, "Influence of pedestrian on traffic," *International Journal of Research and Development in Engineering Sciences*, vol. 7, no. 3, p. 46, Jun. 2025, doi: 10.63328/ijrdes-v7ri3p9.
- [25]. Y. Goldberg, "A Primer on Neural Net-work Models for Natural Language Processing," *Journal of Artificial Intelligence Research*, vol. 57, pp. 345–420, 2016.
- [26]. N Chandrika , Venkata Ramana Guntreddi, " Diffusion-Based Synthetic Motorsport Telemetry Generation for Aero-Stability Prediction Systems " , *International Journal of Computer Science, Engineering and Artificial Intelligence* , vol. 1, no. 1, p 28 – 34, December 2024, DOI: <https://doi.org/10.63328/IJCSEI-V1RI1P5>

How To Cite:

Md.Bushra, G.Venkata Raveli, Dr.Sk.Akbar, "Detecting Misinformation using Deep Learning Techniques", *International Journal of Computational Sciences and Engineering Research* , Volume 3, issue 3 , pp 1 - 7, July 2026.

CrossRef DOI: <https://doi.org/10.63328/ijcser-v3ri3p1>

Declaration

Conflicts of Interest: The authors declare no conflict of interest.

Author Contribution: All authors wrote the main manuscript text and also consent to the submission.

Ethical approval: Not applicable.

Consent to Participate: All authors consent to participate.

Funding: Not applicable, and No funding was received

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Personal Statement: We declare with our best of knowledge that this research work is purely Original Work and No third party material used in this article drafting. If any such kind material found in further online publication, we are responsible only for any judicial and copyright issues.

Acknowledgements

I hereby declare that the project entitled "Detecting Misinformation Using Deep Learning Techniques" submitted in partial fulfillment of the requirements for the award of the degree of Master of Computer Applications (MCA) is a record of original work carried out by me under the guidance of Md. Bushra, Department of Computer Applications. I also certify that the work presented in this project has not been presented, in part or in full, to any other university or institution for the award of any degree, diploma or other qualification. All the information and references have been appropriately referenced as required. I have read this report and I declare that it is my own work, and that it has not been taken from the work of another student or any other source except the source recommended by the teacher.

Overview of the Paper :

